
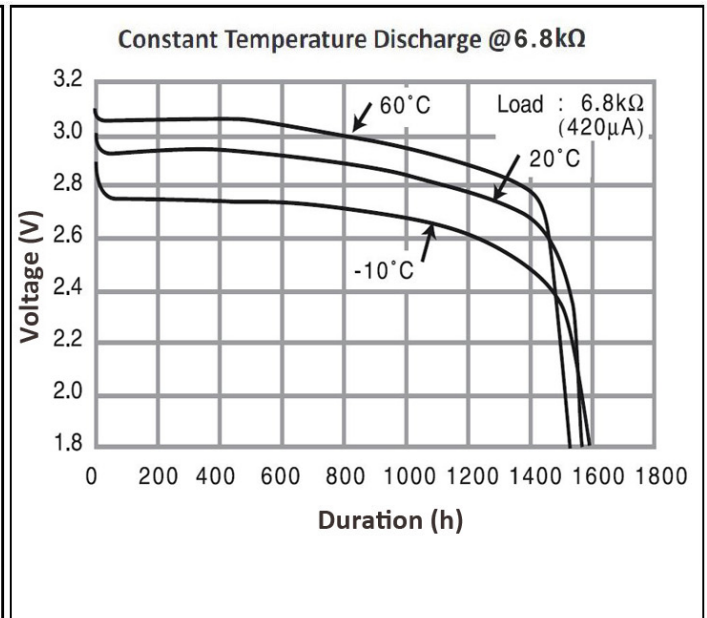


**Diameter: 24.0 mm (0.94")**  
**Height: 5.0 mm (0.20")**

## Specifications

<b>Classifications:</b>	Lithium
<b>Chemical System</b>	Manganese Dioxide Li/Organic Electrolyte
<b>Designation:</b>	IEC: CR2450, ANSI: 5029LC
<b>Nominal Voltage:</b>	3V
<b>Storage Temp:</b>	+5°C to +30°C
<b>Operating Temp:</b>	-30°C to +60°C
<b>Typical Weight:</b>	6.3 g (0.22 oz)
<b>Typical Volume:</b>	2.4 cm <sup>3</sup> (0.14 in <sup>3</sup> )
<b>Typical Li Content:</b>	< 0.3 g (0.01 oz)
<b>Transportation:</b>	For complete details, please see the reference: Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations
Global (except US)	
United States:	49 CFR 173.185

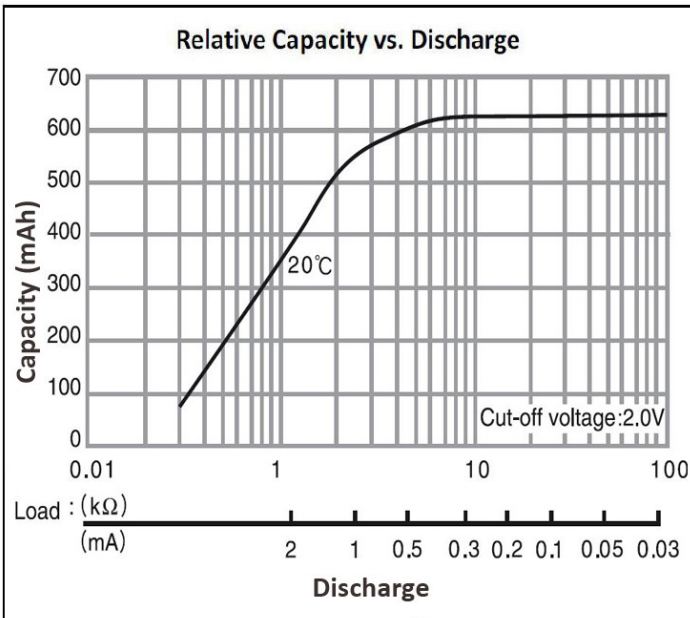

\* Nominal capacity indicates duration until the voltage drops down to 2.0V when discharged at a nominal discharge current at 20°C.  
 \*\* When using these batteries at temperatures outside the range of -20 to +60°C, please consult Duracell in advance for conditions of use.  
 \*\*\* Dimensions and weight are for the battery itself, but may vary depending on the shape of terminals or other factors.